



Side Latch Rim Lock: RK500N Series

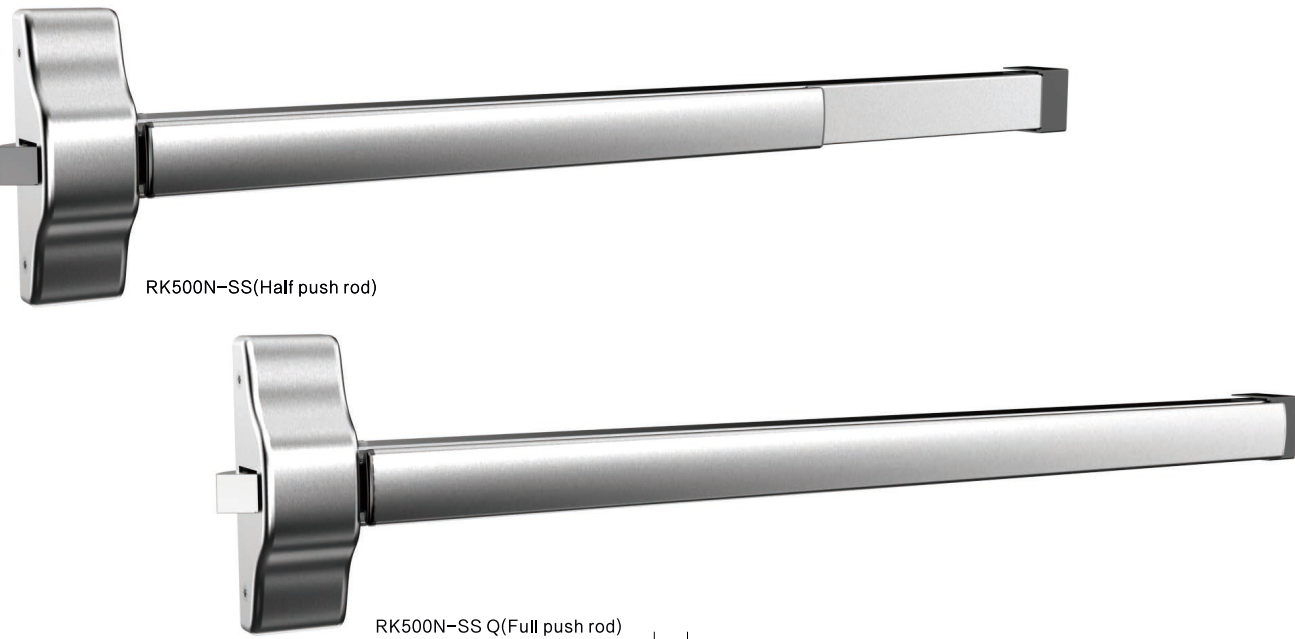

Suitable for single door, Open-mounted single point locking,
Outside operation, no handing
door open by push bar internal, door open by key opens external

The door leaf width over 630mm can be cutting
The door leaf width under 630mm must customize.
Passed national GB30051-2013 standard test,
passed ANSI A156.3 test, Passed 500,000 opening test.



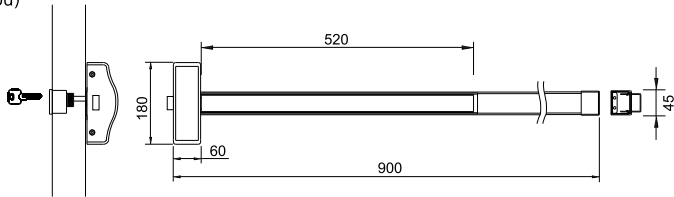


Product specification sheets

Specification	Material	Finish	Alarm function	Pushrod type	Outside handle
RK 500N-SF	Refined steel	Baking finish silver		Half	Optional
RK 500N-SFQ				Full	Optional
RK 500NW-SF			●	Half	Optional
RK 500N-SS	SUS304	Stainless Steel Brushed		Half	Optional
RK 500N-SSQ				Full	Optional
RK 500NW-SS			●	Half	Optional

Note: This series of panic exit device, stainless steel surface treatment standard for brushed stainless steel ,
fine steel surface treatment standard for baking finish silver, other color must be customization.


Outside Trim optional

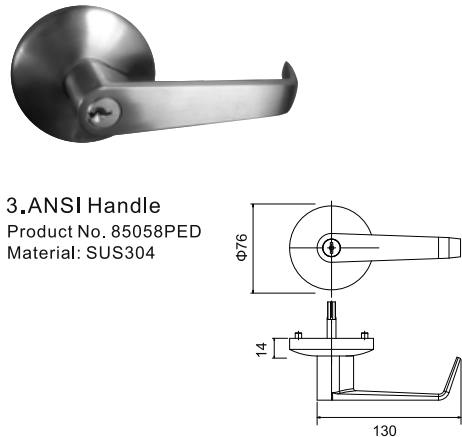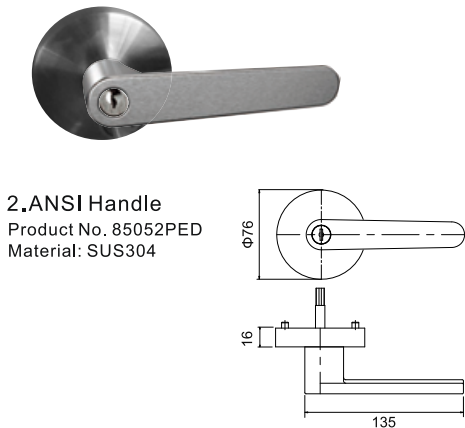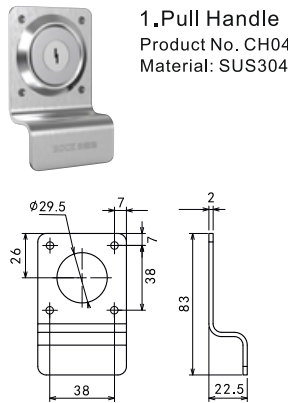

Vertical Rim Lock: RK510N Series

Suitable for double door
Open-mounted single point locking
Outside operation, no handing
door open by push bar internal
door open by key opens external

The door leaf width over 630mm can be cutting
The door leaf width under 630mm must customize
The door hight under 2200mm can be selected
The door hight over 2200mm the connecting
rod should be extended
Passed national GB30051-2013 standard test
passed ANSI A156.3 test
Passed 500,000 opening test

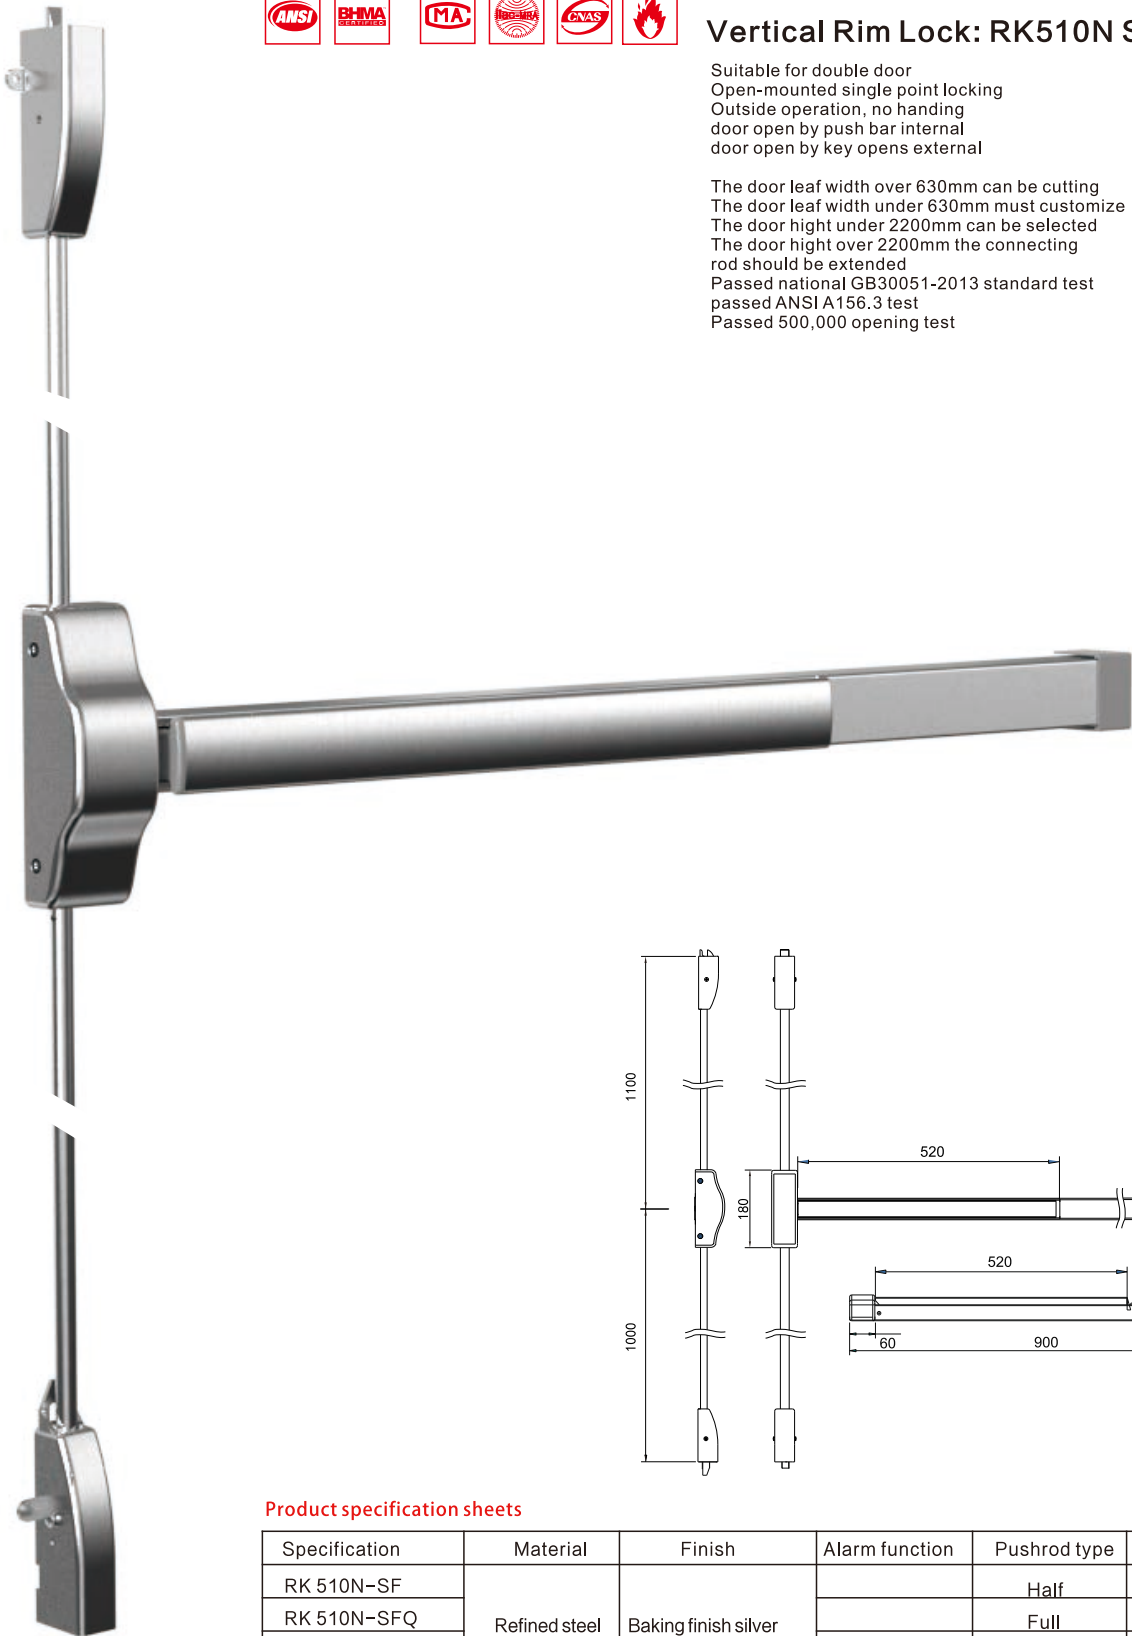


Product specification sheets

Specification	Material	Finish	Alarm function	Pushrod type	Outside handle
RK 510N-SF	Refined steel	Baking finish silver		Half	Optional
RK 510N-SFQ				Full	Optional
RK 510NW-SF			●	Half	Optional
RK 510N-SS	SUS304	Stainless Steel Brushed		Half	Optional
RK 510N-SSQ				Full	Optional
RK 510NW-SS			●	Half	Optional


Note: This series of panic exit device, stainless steel surface treatment standard for brushed stainless steel ,
fine steel surface treatment standard for baking finish silver, other color must be customization.

Side Latch Rim Lock: RK500 Series

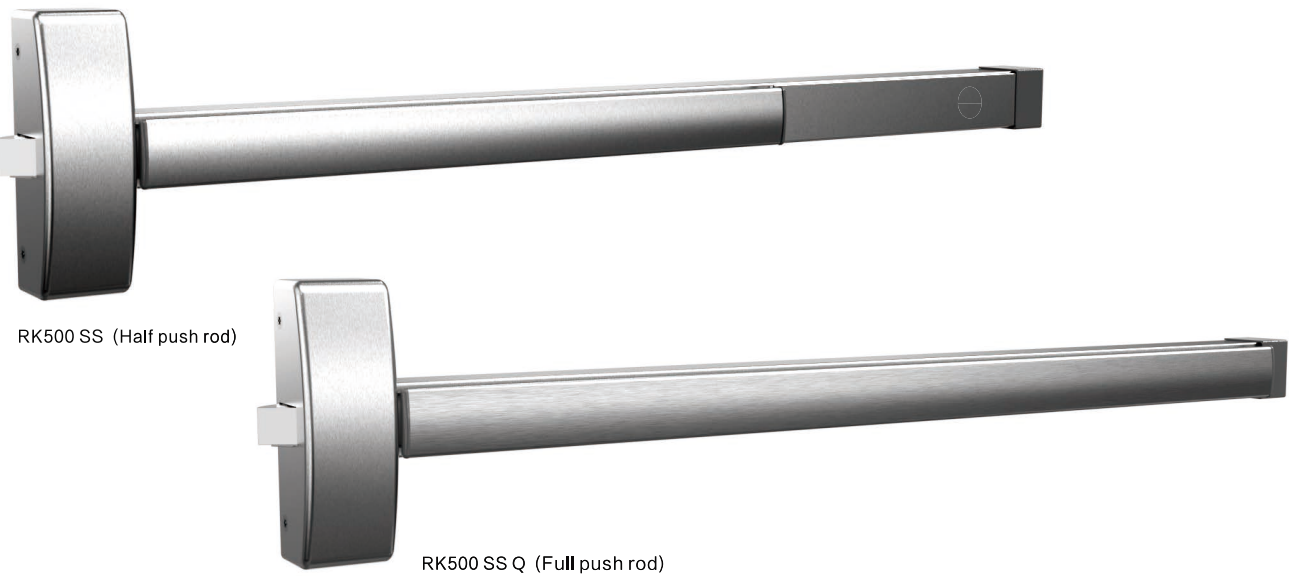

Suitable for single door, Open-mounted single point locking,
Outside operation, no handing
door open by push bar internal, door open by key opens external

The door leaf width over 630mm can be cutting
The door leaf width under 630mm must customize.
Passed national GB30051-2013 standard test,
passed ANSI A156.3 test, Passed 500,000 opening test.

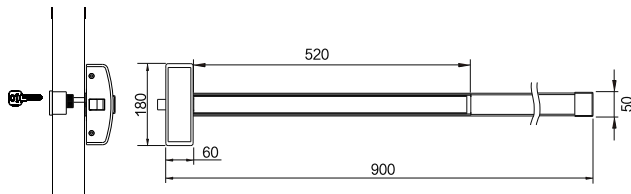

Product specification sheets

Specification	Material	Finish	Alarm function	Pushrod type	Outside handle
RK 500-SF	Refined steel	Baking finish silver		Half	Optional
RK 500-SFQ				Full	Optional
RK 508-SF			●	Half	Optional
RK 500-SS	SUS304	Stainless Steel Brushed		Half	Optional
RK 500-SSQ				Full	Optional
RK 508-SS			●	Half	Optional

Note: This series of panic exit device, stainless steel surface treatment standard for brushed stainless steel ,
fine steel surface treatment standard for baking finish silver, other color must be customization.

Outside Trim optional

1.Pull Handle



No.: CH04

2.ANSI Handle




No.: 85052PED



No.: 85058PED





3.Double door holder
No.: SMQ175X75
For double door
Work with panic bar

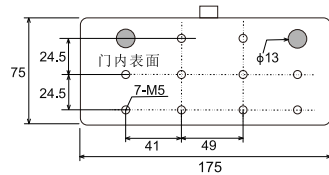

Vertical Rim Lock: RK510 Series

Suitable for double door
Open-mounted single point locking
Outside operation, no handing
door open by push bar internal
door open by key opens external


The door leaf width over 630mm can be cutting
The door leaf width under 630mm must customize
The door high under 2200mm can be selected
The door high over 2200mm the connecting
rod should be extended
Passed national GB30051-2013 standard test
passed ANSI A156.3 test
Passed 500,000 opening test

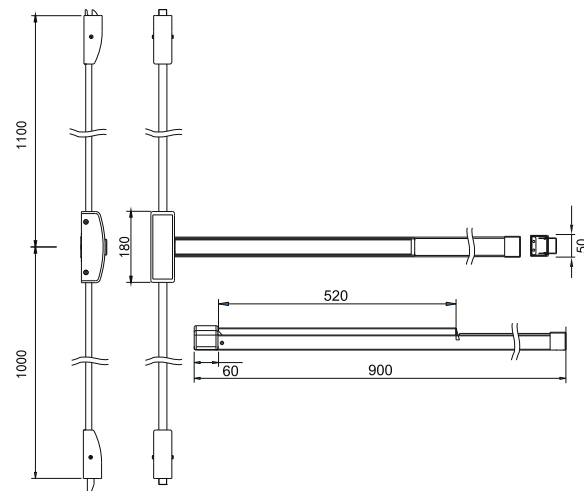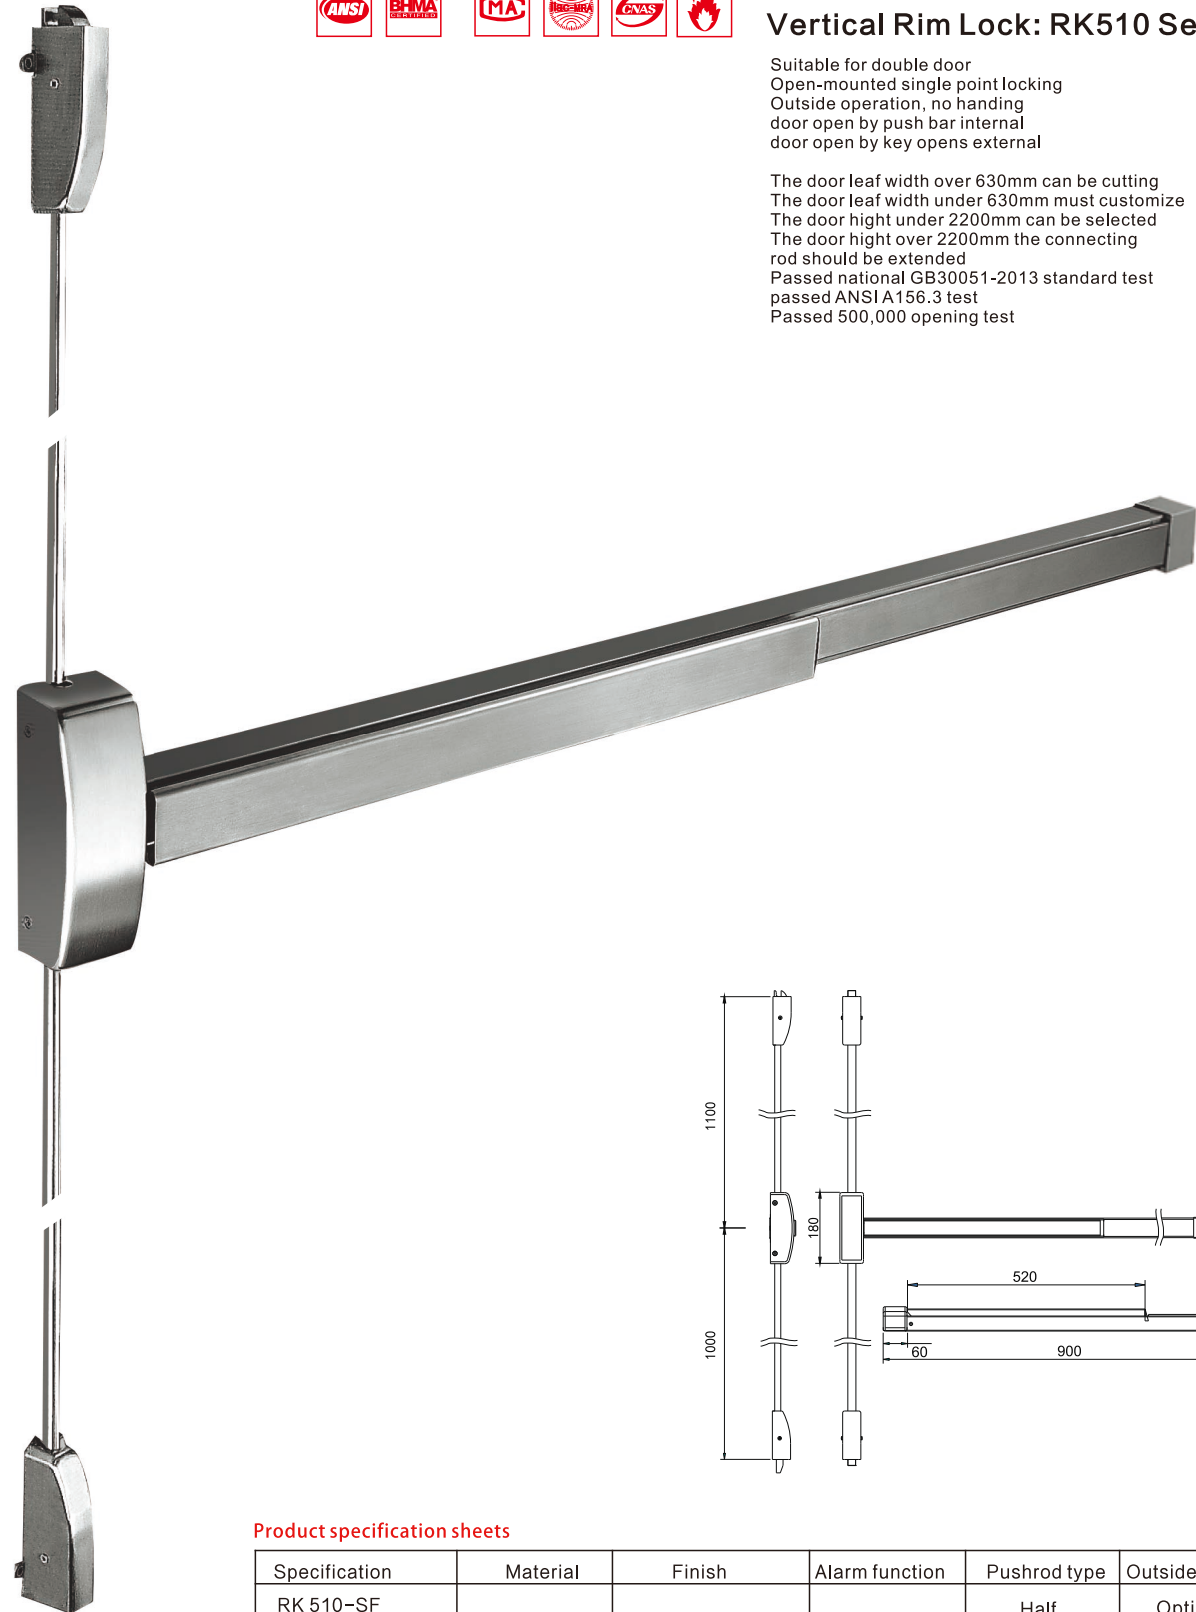

Product specification sheets


Specification	Material	Finish	Alarm function	Pushrod type	Outside handle
RK 510-SF	Refined steel	Baking finish silver		Half	Optional
RK 510-SFQ				Full	Optional
RK 518-SF			●	Half	Optional
RK 510-SS	SUS304	Stainless Steel Brushed		Half	Optional
RK 510-SSQ				Full	Optional
RK 518-SS			●	Half	Optional

Side Latch Rim Lock: RK500B Series

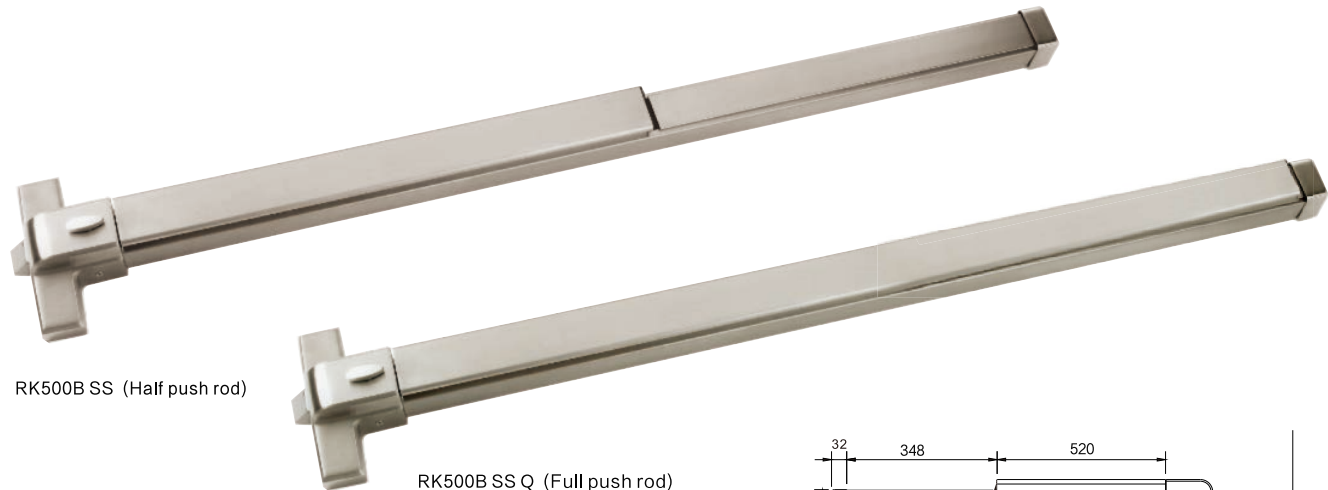

Suitable for single door
Open-mounted single point locking
Outside operation, no handing
door open by push bar internal, door open by key opens external

The door leaf width over 630mm can be cutting
The door leaf width under 630mm must customize
Passed national GB30051-2013 standard testing
Passed ANSI A156.3 test; Passed 500,000 opening test

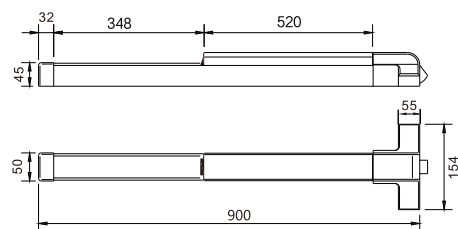

Product specification sheets

Specification	Material	Finish	Alarm function	Pushrod type	Executive standard
RK 500B-SF	Refined steel	Baking finish silver		Half	National
RK 500B-SFQ				Full	
RK 508B-SF			●	Half	
RK 500B-SS	SUS304	Brushed		Half	
RK 500B-SSQ				Full	
RK 508B-SS			●	Half	
RK 500BA-SF	Refined steel	Baking finish silver		Half	ANSI
RK 500BA-SFQ				Full	
RK 508BA-SF			●	Half	
RK 500BA-SS	SUS304	Stainless Steel Brushed		Half	
RK 500BA-SSQ				Full	
RK 508BA-SS			●	Half	

Outside Trim optional

1.Pull Handle



No.: CH04

2.ANSI Handle




No.: 85052PED



No.: 85058PED

3.Double door holder


No.: SMQ175X75
For double door
Work with panic bar



Product specification sheets

Specification	Material	Finish	Alarm function	Pushrod type	Executive standard
RK 510B-SF	Refined steel	Baking finish silver		Half	National
RK 510B-SFQ				Full	
RK 518B-SF			●	Half	
RK 510B-SS	SUS304	Brushed		Half	
RK 510B-SSQ				Full	
RK 518B-SS			●	Half	
RK 510BA-SF	Refined steel	Baking finish silver		Half	ANSI
RK 510BA-SFQ				Full	
RK 518BA-SF			●	Half	
RK 510BA-SS	SUS304	Stainless Steel Brushed		Half	
RK 510BA-SSQ				Full	
RK 518BA-SS			●	Half	

Vertical Rim Lock: RK510B Series

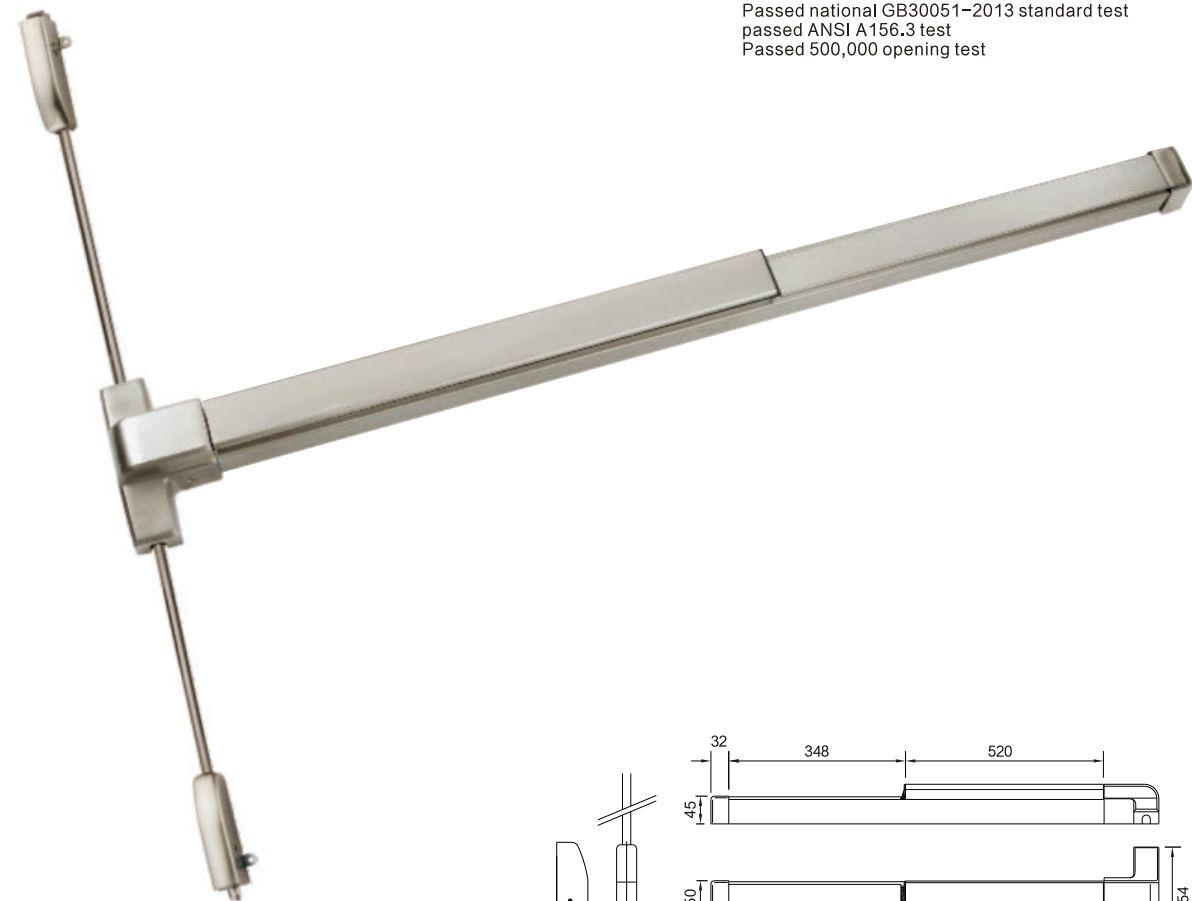

Suitable for double door, Open-mounted single point locking,
Outside operation, no handing
door open by push bar internal, door open by key opens external

The door leaf width over 650mm can be cutting
The door leaf width under 650mm must customize
Passed national GB30051-2013 standard test
passed ANSI A156.3 test
Passed 500,000 opening test

