

Palisade gate locks

A solution for every situation

HSK[®]
Industrial Gate Lock

Features

- ISO 9227 KTL / spraying plastics lockbox withstands 1000 hours of salt spray test.
- Left or right changing of the self-latching bolt throw of the deadbolt > 22 mm in 1 turn of The key-operated self-latching bolt.
- Fixing with two M8 hexagon socket head screws.
- Center distance bolt: without removing the lock box, the 20mm bolt can be adjusted continuously to fit the 40~60mm square pipe.

INDUSTRIAL HIGHT GRADE QUALTY



- ▶ Solid stainless steel bolts
- ▶ Adjustment of the bolts up to 20 mm without removing the lockbox
- ▶ Throw of the deadbolt, 22 mm in 1 turn of the key
- ▶ Key-operated self-latching bolt
- ▶ Easy left or right changing of the self-latching bolt length
- ▶ Tested on a minimum of 1 50.000 cycles

▶ Select handle type

▶ Mecanism:
1 00% stainless stee

▶ Decorative covers



PZ = Profile cylinder
(DIN 18252)



○ Aluminium
H327



○ Stainless steel
H103




○ Nylon
H703

- Our Palisade gate lock is available in various specifications and is particularly well-suited to the road and rail, utilities, education, retail, industrial, airports and ports and data centre sectors.



Stadium



Airport



Villa
Garden gate



BEIJING HSK TECHNOLOGY CO., LTD
www.hsklock.com Email: info@houselock.com.cn TEL: 0086-10-85386092


Industrial Gate Lock





○ This industrial lock is made with an aluminum housing and stainless steel mechanism. We believe this lock should be a standard for all your industrial gates. The 20mm continuous adjustability of the bolts allows a perfect alignment of your locking mechanism. A solid stainless steel deadbolt with a 22mm throw guarantees a secure locking. Standard supplied with aluminum handles and key barrel.

○ HTYS-S Single cylinder lock

- Aluminium powdercoated housing and stainless steel mechanism

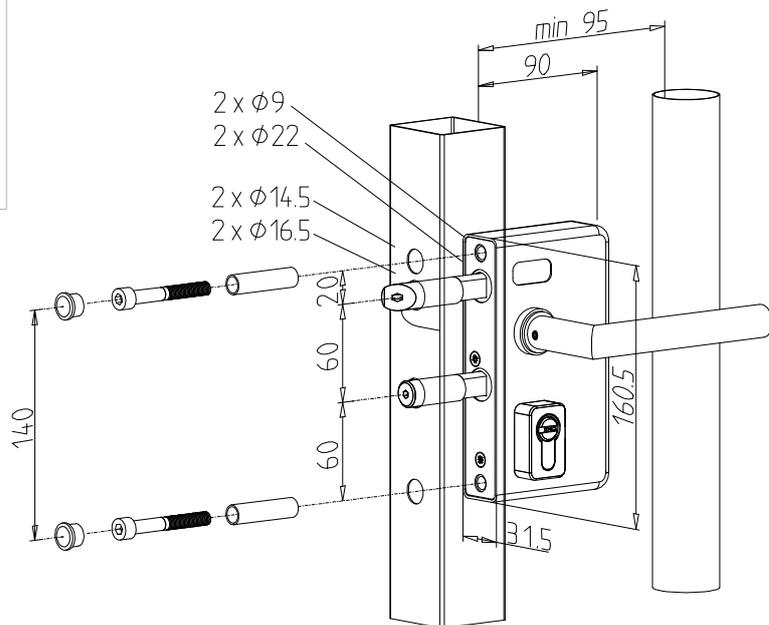


○ Single cylinder installation

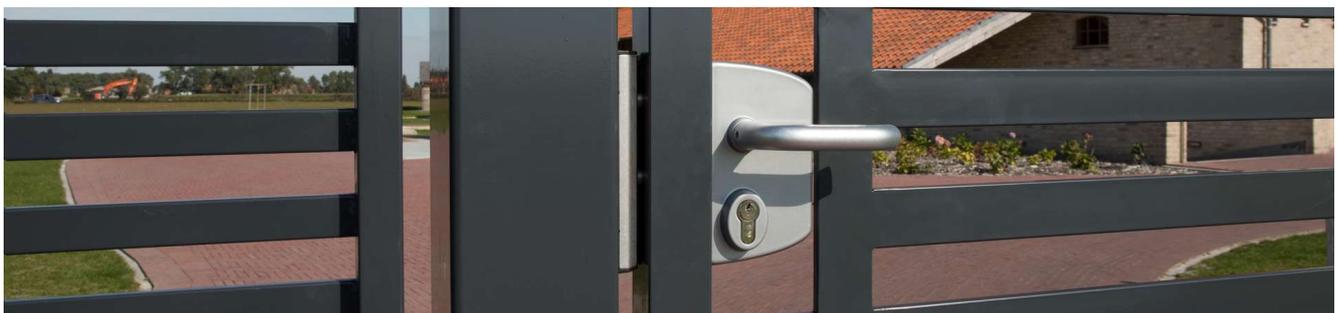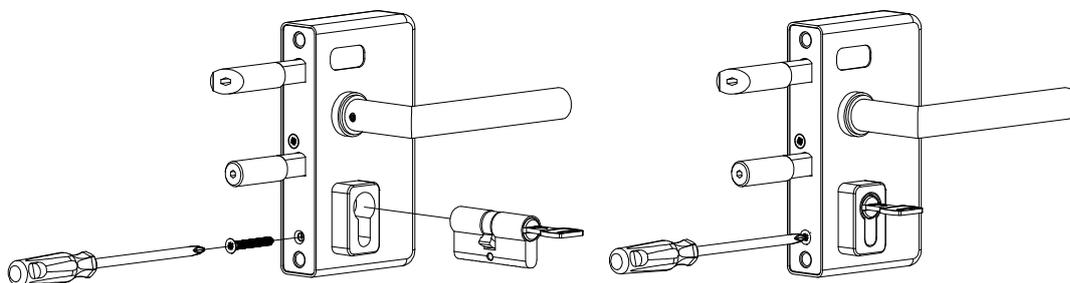

Palisade gate locks

A solution for every situation



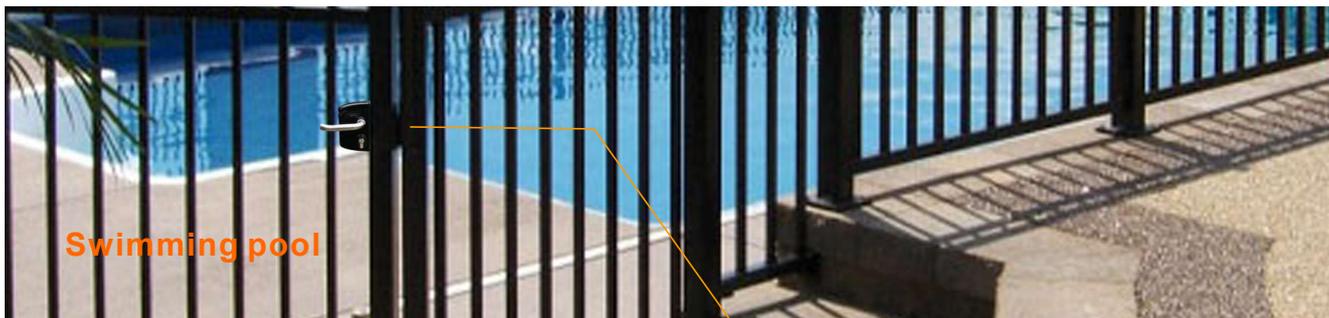


Swimming pool

Keep - Standard for square profiles

- Stainless steel keep, quick-Fix ensures fast and strong mounting. For gate thickness 40-60 mm.

Keeper for HTYS
Code - HK101

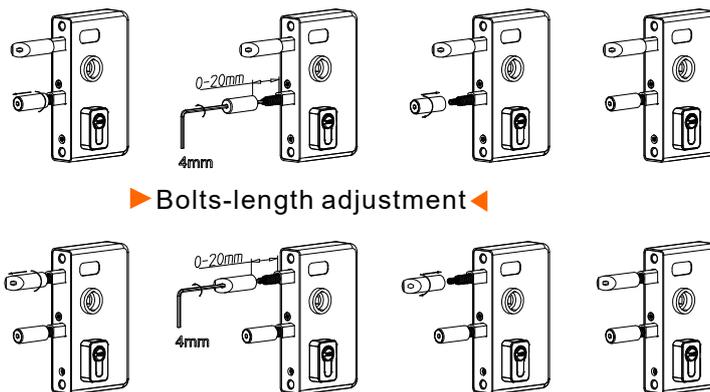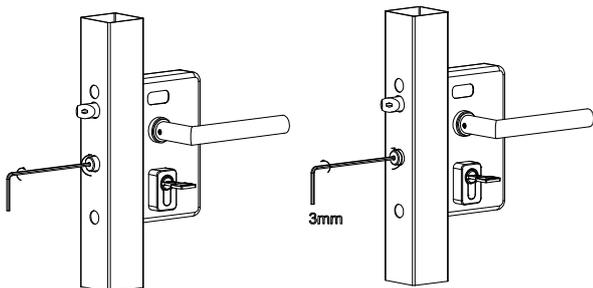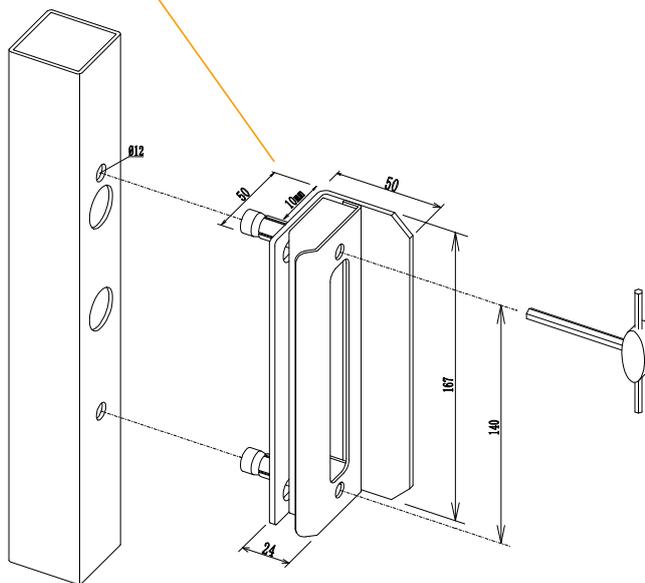


Child Safety



BEIJING HSK TECHNOLOGY CO., LTD
www.hsklock.com Email: info@houselock.com.cn TEL: 0086-10-85386092


Industrial Double Keyed Lock

Industrial locks are designed for swing gate they are made with aluminium housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to provide entry to third parties like the firemen or waste collectors. The double locking of the solid stainless steel night bolt also ensures a secure closure and with the Keeper

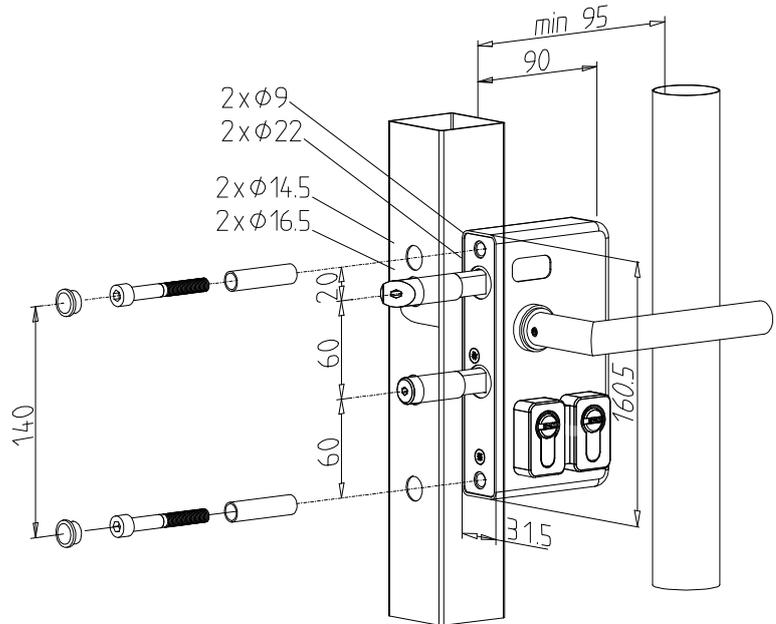

- HTYS-D Double cylinder lock
- You only need to use 1 of the cylinders in order to open or close the lock.

○ Double cylinder installation

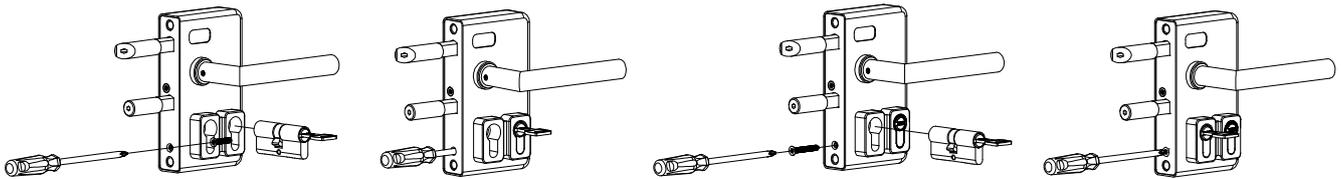

- ▶ Our Palisade gate lock is available in various.
- ▶ Specifications and is particularly well-suited to the road and rail, utilities, education, retail, industrial, airports and ports and data centre sectors.

